

**Before you begin:** These instructions will guide you in properly assembling the unit. Please review all the steps before beginning assembly. Carefully adhere to the Assembly Instructions and User Instructions to help ensure user safety and product integrity.

### WARNING


1. Failure to assemble and/or use the equipment as directed may void the manufacturer's warranty on this product and could result in injury or death.
2. It is your responsibility to familiarize yourself with the proper use of the equipment and the inherent risks of inversion, such as falling on your head or neck, pinching, entrapment or equipment failure.
3. Do not use the inversion rack until you have thoroughly and carefully read the User's Instructions, viewed the Instructional Video, reviewed all other accompanying documents, and inspected the equipment.
4. The steps in the video directly coincide with the steps detailed in these assembly instructions.
5. Follow each step in sequence. Do not skip ahead.
7. Make sure that all fasteners are secure. ONLY install Locking Brackets in **SOLID WOOD** doorways built according to national building codes. DO NOT use in faux or metal doorways.
8. Prior to use, test and inspect the rack to ensure secure installation.

Carefully remove the individual parts from the carton. You should have all of the items listed below. If any items are missing or damaged, contact your retailer or customer service directly (See Pg. 4).

#### Items for Assembly:

	Item #
Large diameter 'L' Bar	E11040
Small diameter 'L' Bar	E11047
Small Straight Bar w/ Warning Label	E11050
Large Straight Bar w/ Blue Foam	E11043
Large diameter 'Elbow' Bar	E11052
Small diameter 'Elbow' Bar	E11054
Two (2) Locking Brackets	E11059
Four (4) 2" (5 cm) Bolts	H11905
Two (2) Bolts: 1 - 1 3/4" (4.4 cm); 1 - 1 1/2" (3.8 cm)	H11904
w/ Lock Nuts	H13011
Six (6) 2" (5 cm) Wood Screws	H15005


*Not included:* Medium Phillips Head screwdriver, Adjustable Wrench, Drill motor w/ 5/32" drill bit.

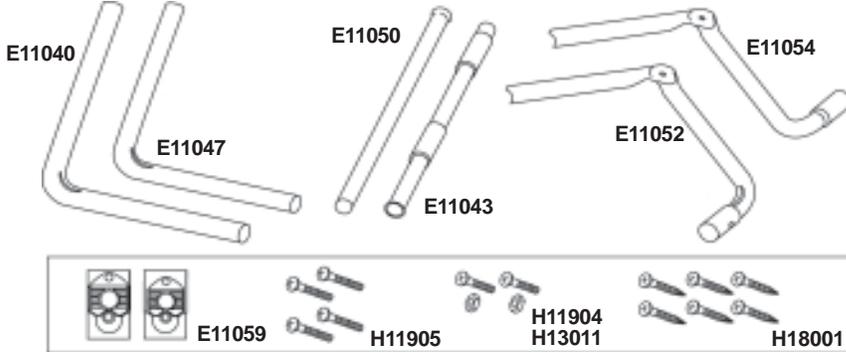

### ASSEMBLY

**Figure 1**

(larger diameter tubes)




#### STEP 1.

**Assemble the three larger diameter tubes (E11040, E11043, E11052) which are marked by a 1, 2 and 3 at each joint:**

- Separate the three larger diameter tubes from the three smaller diameter tubes. The larger diameter tubes use joint numbers 1, 2, and 3.
- Lay out the three larger tubes in relationship to each other. See Figure 1. Be sure that the parts are assembled so that 1 mates to 1, 2 mates to 2, and 3 mates to 3.
- Loosely assemble joints 1 and joints 3 using the 2" (5 cm) bolts (H11905). See Figure 2. DO NOT TIGHTEN THE BOLTS YET.
- Loosely assemble joint 2 with the 1 3/4" (4.4 cm) bolt (H11904) and lock nut (H13011). Insert the bolt so that its head fits in the countersink. See Figure 2A.

**Figure 2**

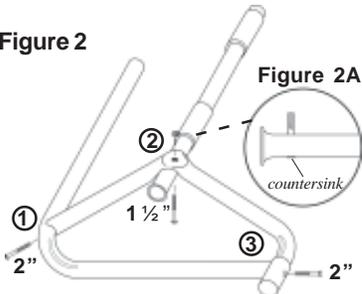

#### STEP 2.

**Assemble the three smaller diameter tubes (E11047, E11050, E11054) which are marked by a 4, 5 and 6 at each joint:**

- Lay out the three smaller diameter tubes in relationship to each other. See Figure 3. Be sure that the parts are assembled so that 4 mates to 4, 5 mates to 5, and 6 mates to 6.
- Loosely assemble joints 5 and joints 6 using the 2" (5 cm) bolts (H11905). DO NOT TIGHTEN THE BOLTS YET.
- Loosely assemble joint 4 with the 1 1/2" (3.8 cm) bolt (H11904) and lock nut (H13011). Insert the bolt so that its head fits in the countersink. See Figure 2A.

**Figure 3**

(smaller diameter tubes)

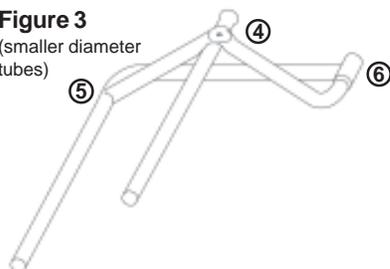


Figure 4

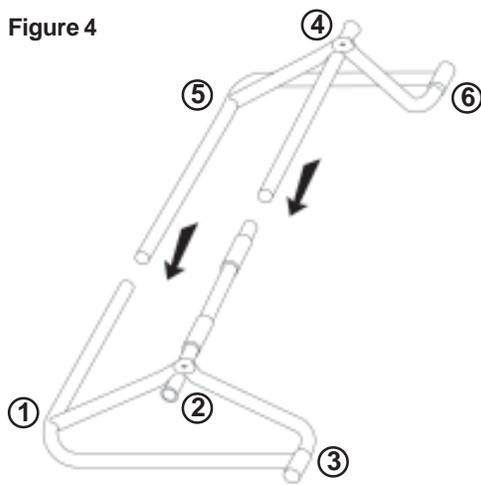


Figure 5




Figure 6


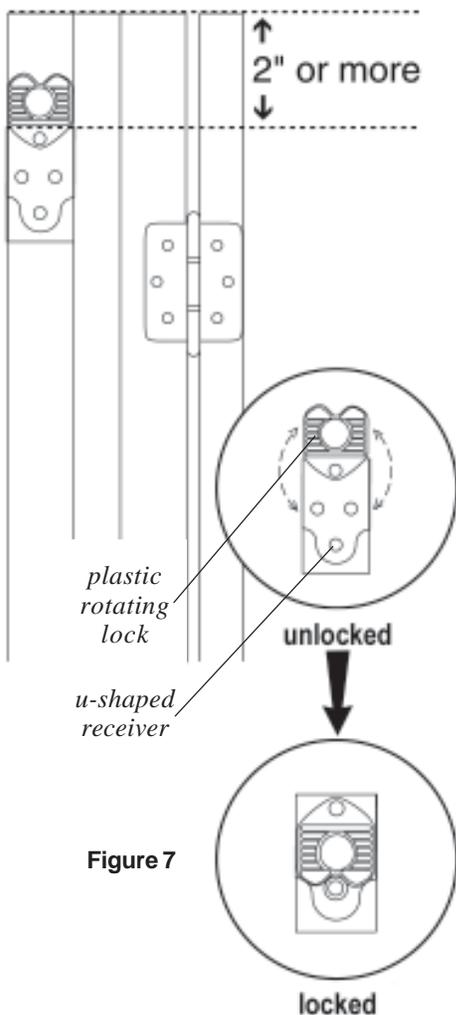


Figure 7

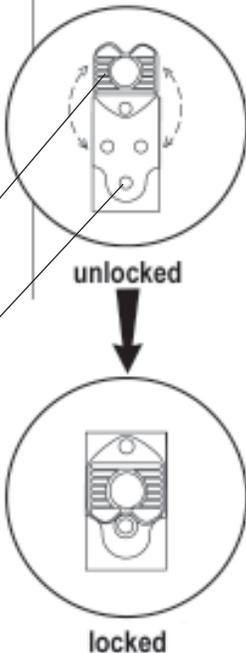

### STEP 3.

#### Final Assembly:

- Slide the smaller half into the larger half. See Figure 4. **TIGHTEN ALL BOLTS** using a screwdriver and wrench. The width of the EZ-Up™ Inversion Rack may be adjusted to fit doorways 28 to 36 inches (71 to 91 cm) wide by sliding the smaller half in or out, depending upon the size of your door frame.

#### ⚠ WARNING

Failure to install Locking Brackets in **SOLID WOOD** doorways built according to national building codes could result in serious injury or death.

### STEP 4.

#### Installation of Locking Brackets:

- Important:** There are two sizes of Locking Brackets, one to fit the Large Straight Bar (with blue hand grips) and one to fit the Small Straight Bar (with red warning label). The Locking Brackets should mount on the door frame opposite from the hinged door, to allow use of the equipment without interfering with operation of the door. See Figure 5. With your back to the door, the large Locking Bracket will mount on your **left** and the small Locking Bracket on your **right**.
- Install the first Locking Bracket as shown in Figure 6. Place the Locking Bracket against the doorstop edge, and 2" (5 cm) or more down from the top of the door frame. **CAUTION: Make sure the plastic rotating lock is on top.**
- Mark and then drill three 5/32" (3.9 mm) diameter holes and drill at least 2" (5cm) deep into the door frame.
- Mount the Locking Bracket using the three wood screws provided (H18001). **YOU MUST USE THE SCREWS PROVIDED—DO NOT SUBSTITUTE WITH OTHER LENGTH SCREWS.** Screws must fully engage the door frame.
- Install the second Locking Bracket on the opposite side of the door frame at the same height as the first Locking Bracket. After both Locking Brackets are installed, extend your EZ-Up™ Inversion Rack out to the width of the door frame and hook the flared tube ends into the u-shaped receiver in each Locking Bracket.
- Lock the EZ-Up™ Inversion Rack into the Locking Brackets by snapping the plastic, rotating lock over the top of the bar. See Figure 7. **IMPORTANT:** Always check to make sure the tubes are securely locked in place before hanging on the rack.

#### ⚠ WARNING

Failure of the rotating lock to snap over the top bar is indication of improper assembly and if not corrected, could result in serious injury or death.

#### ⚠ WARNING

#### **TO WEIGHT TEST THE EZ-UP INVERSION RACK FOR PROPER INSTALLATION:**

After installing the Locking Brackets and securing the EZ-Up™ Inversion Rack in place, two people should hang by their hands from one end of the rack (one person on the upper bar and one on the lower bar). While hanging, bounce up and down several times. Next, both people should hang from the other end and repeat the test.

**If the door frame is unstable or weak, DO NOT continue use of the rack in that door frame.**

**ONLY one person at a time should use the EZ-Up™ Inversion Rack. Do not allow children to use unsupervised.**

#### ⚠ WARNING

**The EZ-Up™ Inversion Rack is to be used ONLY with Teeter Hang Ups® brand Gravity Boots or Gravity Boots XL, which have been designed specifically for use with Teeter Hang Ups® products.**

### ⚠ WARNING

#### Important Safety Instructions:

It is your responsibility to familiarize yourself with the proper use of the equipment and the inherent risks of inversion, such as falling on your head or neck, pinching, entrapment or equipment failure. Do not use the inversion rack until you have thoroughly and carefully read the User Instructions, viewed the Instructional Video, reviewed all other accompanying documents, and inspected the equipment.

1. **DO NOT** use the equipment without a licensed physician's approval. Carefully review the following list of medical contraindications for inversion with your licensed physician: (This is not an exhaustive list, it is intended only for reference) Pregnancy; Hiatal Hernia, Ventral Hernia; Glaucoma, retinal detachment or conjunctivitis; High blood pressure, hypertension, recent stroke or transient ischemic attack; Heart or circulatory disorders; Spinal injury, Cerebral Sclerosis, and acutely swollen joints; Bone weakness (osteoporosis), recent and/or unhealed fractures, medullary pins, and surgically implanted orthopedic supports; The use of anticoagulants, including high doses of Aspirin; Middle ear infection; Extreme obesity.
2. **DO NOT** use if you are over 250 lbs. (113.6 kg).
3. **DO NOT** operate equipment while under the influence of drugs, alcohol, or medication that may cause drowsiness or disorientation.
4. **NEVER** allow children to use the equipment unsupervised.
5. **DO NOT** drop or insert objects into any opening. Keep hands and fingers away from moving parts to avoid injury.
6. **ALWAYS** inspect the equipment prior to use. Make sure that all fasteners are secure.
7. **ALWAYS** wear securely tied lace-up shoes with a flat sole, such as a normal tennis style shoe. **DO NOT** wear shoes with thick soles, boots, high-tops or any shoe that extends above the anklebone.
8. **DO NOT** modify the equipment or use accessory attachments that are not recommended by the manufacturer, as this may result in serious injury or death. Utilize the equipment for its intended purpose only.
9. **DO NOT** use weights, elastic bands or any other exercise or stretching device while on the inversion rack.
10. This product is not intended for use in public facilities.

Figure 8



#### PRIOR TO USE

Make sure to weight test the EZ-Up Inversion Rack for proper installation. After installing the Locking Brackets and securing the EZ-Up™ Inversion Rack in place, two people should hang by their hands from one end of the rack (one person on the upper bar and one on the lower bar). While hanging, bounce up and down several times. Next, both people should hang from the other end and repeat the test. **If the door frame is unstable or weak, DO NOT continue use of the rack in that door frame.**

#### USING THE EZ-Up™ INVERSION RACK

**Mounting** (See Figure 8):

- Grasp the lower bar. Swing one leg up and place your foot against the bottom of the upper bar.
- Raise your other foot up and hook the boot on the upper bar.
- Shift your weight to the hooked boot and hook the second boot.
- Grasp the EZ-Reach handles to lower your body. See Figure 9.

**Dismounting** (See Figure 9):

- Grasp the EZ-Reach handles (as shown) to raise your body.
- Bring hands up and grasp the blue foam grips on the lower horizontal bar. To reduce the chance of dizziness while getting down, pause for 30 seconds with both hands on the lower bar while the boots are still hooked up. Relax in this position to stretch the upper back.
- Unhook one boot and place that foot against the bottom of the upper bar. See Figure 8. Shift your weight to the unhooked foot and unhook the second boot.

Figure 9



Figure 10



### ⚠ WARNING

**Until you are fully confident in your ability to get down from an inverted position always work with a spotting partner.**

**TRY THE ULTIMATE ABDOMINAL EXERCISE– THE INVERTED SIT-UP!** (See Figure 10)  
Other EZ-Up™ Rack exercises include: Crunches, Reverse Squats, Twisting and Stretching, Relaxation Breathing, and Chin-ups.

# HELPFUL SUGGESTIONS FOR INVERTING EZ-Up™ INVERSION RACK AND GRAVITY BOOTS

## 1. Begin Slowly:

- At full 90° inversion, begin with only 1-2 minutes per session.
- Stay inverted only as long as you are comfortable, even if only for a few seconds at first.
- We suggest you always have someone with you when you invert.
- Come up slowly to allow your body to readjust. Bring hands up and grasp the blue foam grips on the lower horizontal bar. To reduce the chance of dizziness while getting down, pause for 30 seconds with both hands on the lower bar while the boots are still hooked up. Dizziness after a session is a sign that you have come up too fast.

## 2. Make Changes Gradually:

- Increase the time only if it is comfortable; stay at 1-2 minutes for a week or more.
- You may want to increase your routine from 1-2 minutes to 5 or more over time - just listen to your body. Remember, this is not a no pain, no gain situation!
- Add stretching and light exercises only after you are comfortable with inversion.

## 3. Pay Attention to What Your Body Tells You:

- Remind yourself that your body is unique and it will tell you what is good for it.
- If other people invert longer, it has nothing to do with your body.
- Wait for a while after you have eaten before you invert.
- If inversion makes you nauseous, don't fight it. Come up as soon as you feel queasy, even if after only a few seconds. Give it time – it may take weeks or months before your inner ear gets used to inverting.

## 4. Keep Moving While Inverted:

- Movement while inverted may help make inversion a more comfortable experience and may help joints to realign and muscles to stretch and relax.

## 5. Do It Regularly:

- We suggest two or three short sessions of inversion each day.

### ⚠ WARNING

Do not use if you are over 250 lbs. / 113.6 kg.  
Never let children use the EZ-Up™ Inversion Rack / Gravity Boots unsupervised.

### Also available from Teeter Hang Ups®: Gravity Boots XL

- **Developed for use by the U.S. Military**
- **Designed for Larger Ankles**  
Diameter is 1" larger than the standard Gravity Boots; height is 1½" taller. Provides greater support and comfort for a wider range of users. Eliminates the need for calf loops.
- **Durable, Lightweight Construction**  
Lightest boots on the market, without compromised durability. DuPont Hytrel plastic liners, nylon-glass alloy hooks and supersoft foam liners ensure strength and comfort.
- **Self-locking Ratchet Buckles**  
Double-lock system ensures a secure fit.
- **Adaptable for Multiple Users**  
Boot straps adjust to ankles varying several inches in diameter.



**CAUTION**  
Users with small calves or ankles may not be secure using the SL Cobra model boots.

*For additional languages in Spanish, French, Dutch, German, Italian or Portuguese, please contact customer service.*

For information about the 5-year warranty, or if you have any problems assembling the equipment or questions about its use, please contact Customer Service at the appropriate location below:

#### **USA & Canada:**

STL International, Inc.  
9902 162<sup>nd</sup> St. Ct. E., Puyallup, WA 98375  
Toll Free (Phone) 800-847-0143 (Fax) 800-847-0188  
Local (Phone) 253-840-5252 (Fax) 253-840-5757  
(email) [Info@STLIntl.com](mailto:Info@STLIntl.com) (web) [www.STLIntl.com](http://www.STLIntl.com)

#### **International:**

Inversion International, Ltd.  
PO Box: AP 59245, New Providence Island, Bahamas  
(Phone) +1-242-362-1001  
(Fax) +1-242-362-1002  
(email) [Info@InversionInternational.com](mailto:Info@InversionInternational.com) (web) [www.InversionInternational.com](http://www.InversionInternational.com)